


FLANGE ADAPTER COUPLING

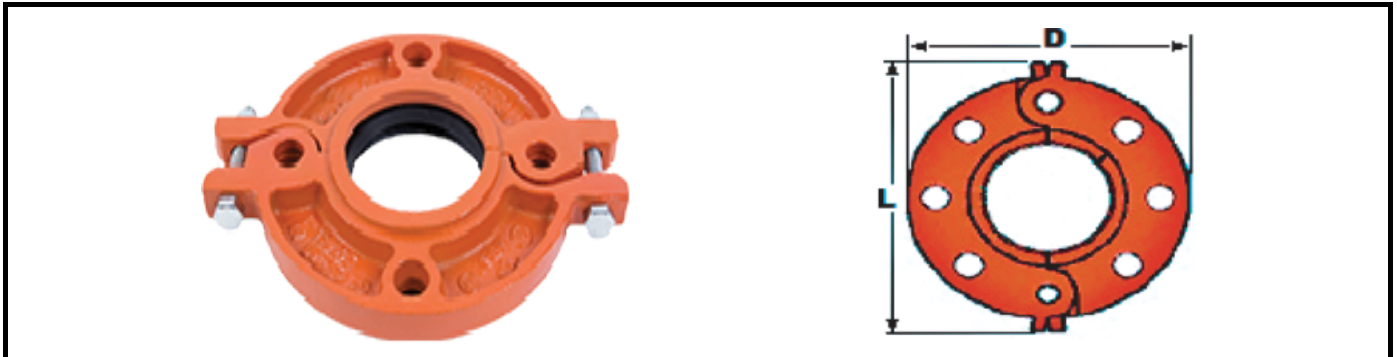

FLANGE ADAPTER - UL / FM PRESSURE 175 PSI - ANSI PRESSURE 150 PSI

PART NO.	SIZE	OD	DIMENSIONS (IN)		NUMBER OF FLANGE BOLTS	WEIGHT (LBS.)
			D	L		
GF-020	2"	2.375"	6.46	8.27	4	3.60
GF-025	2 1/2"	2.875"	6.93	9.45	4	3.60
GF-003	3"	3.500"	7.56	9.84	4	4.80
GF-040	4"	4.500"	8.82	10.94	8	6.60
GF-050	5"	5.563"	10.00	12.20	8	8.10
GF-060	6"	6.625"	11.10	13.23	8	8.40
GF-080	8"	8.625"	13.50	15.55	8	14.30
GF-100	10"	10.750"	15.91	18.50	12	19.40

- Maximum working pressure 300 psi (20.7 bar) depending on flange size and schedule of pipe
- 3/8" x 2-3/4" latch bolt included
- 100% magnetic particle inspection of each bolt
- Each bolt has a minimum tensile strength of 110,000 psi
- Gasket Grade E- EPDM (green stripe) -30°F (-34°C) to +230°F (+110°C)
- Gasket Grade T- Nitrile (orange stripe) -20°F (-29°C) to + 180°F (+82°C)
- Ductile iron housings conform to ASTM A-536 Grade 65-45-12
- Groove dimensions to AWWA C-606
- Matches Class 125/150 flange dimensions
- Finishes: Orange enamel paint Hot dipped galvanized conforming to ASTM A-153

