


LEAD FREE BRASS BALL VALVE

PART NO.	SIZE
BVN2-12	1/4"
BVN2-03	3/8"
BVN2-05	1/2"
BVN2-07	3/4"
BVN2-10	1"
BVN2-12	1 1/4"
BVN2-15	1 1/2"
BVN2-20	2"
BVN2-25	2 1/2"
BVN2-30	3"
BVN2-40	4"

Valve Seat Rating

600 WOG - 150 WSP

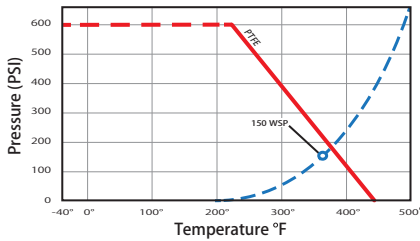

Features

- Dezincification resistant brass
- Gland follower and single o-ring stem design
- Blow-out proof stem
- Stainless Steel ball and stem
- 100% leak tested
- Wetted surfaces contain less than .25% lead content



Approvals

- UL Listed up to 175 PSI (1/4" - 2")
 - MHKZ - Manual valves
 - YRPV - Gas shut-off valves
- IAPMO Certified
 - NSF 61-8
 - NSF 372
 - Uniform Plumbing Code (cUPC)
 - IAPMO/ANSI Z1157-2014
 - NSF/ANSI 14-2014
- CSA Certified
 - CGA 3.16 (125 PSIG) (1/4" - 2")
 - ANSI Z21.15 (.5 PSIG) (1/4" - 2")
 - CGA CR91 (5 PSIG) (1/4" - 2")
 - ASME B16.44 (5 PSIG) (1/4" - 2")
 - ASME B16.33 (125PSIG) (1/2" - 2")
- MSS SP-110
- ANSI B1.20.1
- RoHS Compliant