


## 1096 STAINLESS STEEL CLAMP ON SADDLE

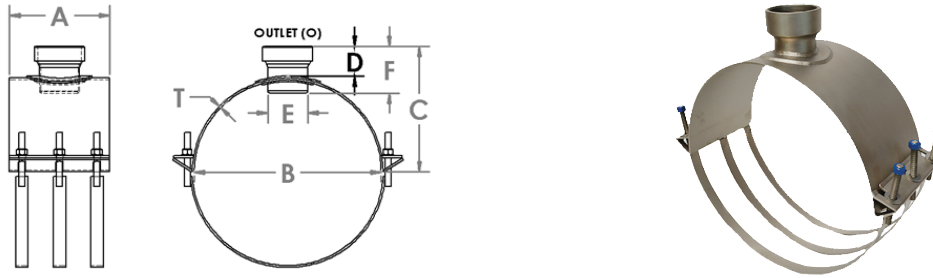

| PART NO.     | NOMINAL SIZE (B) | OUTLET (O) | DIMENSIONS |         |       |         |        |       | WEIGHT. IN LBS. |
|--------------|------------------|------------|------------|---------|-------|---------|--------|-------|-----------------|
|              |                  |            | A          | C       | D     | E       | F      | T     |                 |
| 1096-183-03  | 18.300"          | 3" FIPT    | 10"        | 9.805"  | 3.50" | 4.000"  | 4.875" | .188" | 33              |
| 1096-183-04  | 18.300"          | 4" FIPT    | 10"        | 9.805"  | 3.50" | 4.000"  | 5.250" | .188" | 35              |
| 1096-183-06F | 18.300"          | 6" FLG     | 10"        | 9.805"  | 4.75" | 5.625"  | 5.750" | .188" | 44              |
| 1096-183-08F | 18.300"          | 8" FLG     | 12"        | 9.805"  | 4.75" | 8.625"  | 5.750" | .188" | 57              |
| 1096-183-10F | 18.300"          | 10" FLG    | 15"        | 9.805"  | 4.75" | 10.750" | 5.750" | .188" | 61              |
| 1096-187-03  | 18.700"          | 3" FIPT    | 10"        | 9.975"  | 3.50" | 4.000"  | 4.875" | .188" | 33              |
| 1096-187-04  | 18.700"          | 4" FIPT    | 10"        | 9.975"  | 3.50" | 4.000"  | 5.250" | .188" | 35              |
| 1096-187-06F | 18.700"          | 6" FLG     | 10"        | 9.975"  | 4.75" | 5.625"  | 5.750" | .188" | 44              |
| 1096-187-08F | 18.700"          | 8" FLG     | 12"        | 9.975"  | 4.75" | 8.625"  | 5.750" | .188" | 57              |
| 1096-187-10F | 18.700"          | 10" FLG    | 15"        | 9.975"  | 4.75" | 10.750" | 5.750" | .188" | 61              |
| 1096-204-03  | 20.400"          | 3" FIPT    | 10"        | 10.825" | 3.50" | 4.000"  | 4.875" | .188" | 36              |
| 1096-204-04  | 20.400"          | 4" FIPT    | 10"        | 10.825" | 3.50" | 4.000"  | 5.250" | .188" | 37              |
| 1096-204-06F | 20.400"          | 6" FLG     | 10"        | 10.825" | 4.75" | 5.625"  | 5.750" | .188" | 46              |
| 1096-204-08F | 20.400"          | 8" FLG     | 12"        | 10.825" | 4.75" | 8.625"  | 5.750" | .188" | 59              |
| 1096-204-10F | 20.400"          | 10" FLG    | 15"        | 10.825" | 4.75" | 10.750" | 5.750" | .188" | 63              |
| 1096-220-03  | 22.047"          | 3" FIPT    | 10"        | 11.645" | 3.50" | 4.000"  | 4.875" | .188" | 39              |
| 1096-220-04  | 22.047"          | 4" FIPT    | 10"        | 11.645" | 3.50" | 4.000"  | 5.250" | .188" | 40              |
| 1096-220-06F | 22.047"          | 6" FLG     | 10"        | 11.645" | 4.75" | 5.625"  | 5.750" | .188" | 49              |
| 1096-220-08F | 22.047"          | 8" FLG     | 12"        | 11.645" | 4.75" | 8.625"  | 5.750" | .188" | 63              |
| 1096-220-10F | 22.047"          | 10" FLG    | 15"        | 11.645" | 4.75" | 10.750" | 5.750" | .188" | 67              |
| 1096-248-03  | 24.803"          | 3" FIPT    | 10"        | 13.025" | 3.50" | 4.000"  | 4.875" | .188" | 41              |
| 1096-248-04  | 24.803"          | 4" FIPT    | 10"        | 13.025" | 3.50" | 4.000"  | 5.250" | .188" | 43              |
| 1096-248-06F | 24.803"          | 6" FLG     | 10"        | 13.025" | 4.75" | 5.625"  | 5.750" | .188" | 52              |
| 1096-248-08F | 24.803"          | 8" FLG     | 12"        | 13.025" | 4.75" | 8.625"  | 5.750" | .188" | 65              |
| 1096-248-10F | 24.803"          | 10" FLG    | 15"        | 13.025" | 4.75" | 10.750" | 5.750" | .188" | 67              |
| 1096-279-03  | 27.953"          | 3" FIPT    | 10"        | 14.605" | 3.50" | 4.000"  | 4.875" | .188" | 45              |
| 1096-279-04  | 27.953"          | 4" FIPT    | 10"        | 14.605" | 3.50" | 4.000"  | 5.250" | .188" | 46              |
| 1096-279-06F | 27.953"          | 6" FLG     | 10"        | 14.605" | 4.75" | 5.625"  | 5.250" | .188" | 55              |

- Body material of construction is 304 stainless steel conforming to ASTM A240.
- Outlet material of construction is 304 stainless steel pipe conforming to ASTM A 778/ A312.
- Outlet connection (O) is FIPT, female pipe thread conforming to ASTM A351, threads conform to ANSI B1.20.1.
- Outlet connection (O) is FLG, ½" thick 304 stainless steel plate flange conforming to ASTM A182 w/ drill pattern to ASME/ANSI class 150.
- Saddle straps material is 304 stainless steel conforming to ASTM A276 and 18-8 all thread, with hex nut and flat washer.
- Gasket seal material is EPDM.
- Pressure rating of 150 psi.
- Dimensions C, D, F may have variance of +/- .50" upon installation.